

# AIEdge-X<sup>®</sup> 300-RTX30

Industrial AI Computing System at The Edge Powered by Intel<sup>®</sup> 8th Gen Intel<sup>®</sup> Core™ CPU and NVIDIA<sup>®</sup> Graphics Card



## Main Features

- Supports 8th/9th Gen Intel<sup>®</sup> Core™ - i3/i5/i7 socket type processor up to 65W
- PCI-e slot supports PCI-e x16 graphics card up to 350W
- Validated with NVIDIA RTX30 series graphics card
- Industrial AI system stylish yet able to contain powerful GPU
- Support optional M.2 module for Wi-Fi and flash storage
- Support 1 x SATA 2.5" HDD/SSD

## Product Overview

Powered by the 8th/9th generation Intel<sup>®</sup> Core™ processor, the AIEdge-X<sup>®</sup> 300-RTX30 GPU enhanced Edge PC that can handle powerful multimedia content. In addition, it includes one expansion slot for graphics card that supports up to NVIDIA RTX 3090 GPU which powers up to 10496 CUDA Cores, not only does it offer stunning visuals for image projecting, it is also optimal for AI machine/deep learning. AIEdge-X<sup>®</sup> 300-RTX30 engages “calls to action” with virtual interactions in order to increase product interest and dwell time.

The AIEdge-X<sup>®</sup> 300-RTX30, supporting HDMI display, LAN ports, USB 3.0 ports, and a RS232/RS422/RS485 interface, is an ideal high-end PC to optimize Image analytics, interactive projection, information visualization, convey brand messages, customer engagement, and smart retail management efficiencies to increase customer interaction and brand awareness. The AIEdge-X<sup>®</sup>300-RTX30 can also support usages in education, interactive

## Specifications

### CPU Support

Generation	Socket Type	CPU	Smart Cache	Cores	Threads	Base Frequency	TDP
8th Coffee Lake	FCLGA1151	i3-8100T	6M	4	4	3.1GHz	35W
8th Coffee Lake	FCLGA1151	i5-8500T	9M	6	6	2.1GHz	35W
8th Coffee Lake	FCLGA1151	i7-8700T	12M	6	12	2.4GHz	35W
9th Coffee Lake Refresh	FCLGA1151	i3-9100TE	6M	4	4	2.2GHz	35W
9th Coffee Lake Refresh	FCLGA1151	i5-9500TE	9M	6	6	2.2GHz	35W
9th Coffee Lake Refresh	FCLGA1151	i7-9700TE	12M	8	8	1.8GHz	35W
8th Coffee Lake	FCLGA1151	i3-8300	8M	4	4	3.7GHz	65W
8th Coffee Lake	FCLGA1151	i5-8500	9M	6	6	3.0GHz	65W
8th Coffee Lake	FCLGA1151	i7-8700	12M	6	12	3.2GHz	65W

### Chipset

- Intel<sup>®</sup> PCH Q370

### Graphics

- Supports up to RTX 2060 (graphics card optional)
  - Integrated graphic powered by Intel<sup>®</sup> UHD graphics 630
  - Suggested expansion card dimension within the limit of 290mm (L) x 121mm (W) x 43mm (H)


- Validated graphics card include:

- ASUS PH-RTX2060-O6G
- Leadtek Quadro P2200

### Main Memory

- 2 x 260-pin SO-DIMM sockets support DDR4-2400/2666 MHz non ECC, un-buffered memory up to 32G (single socket max16GB)

## System Architecture

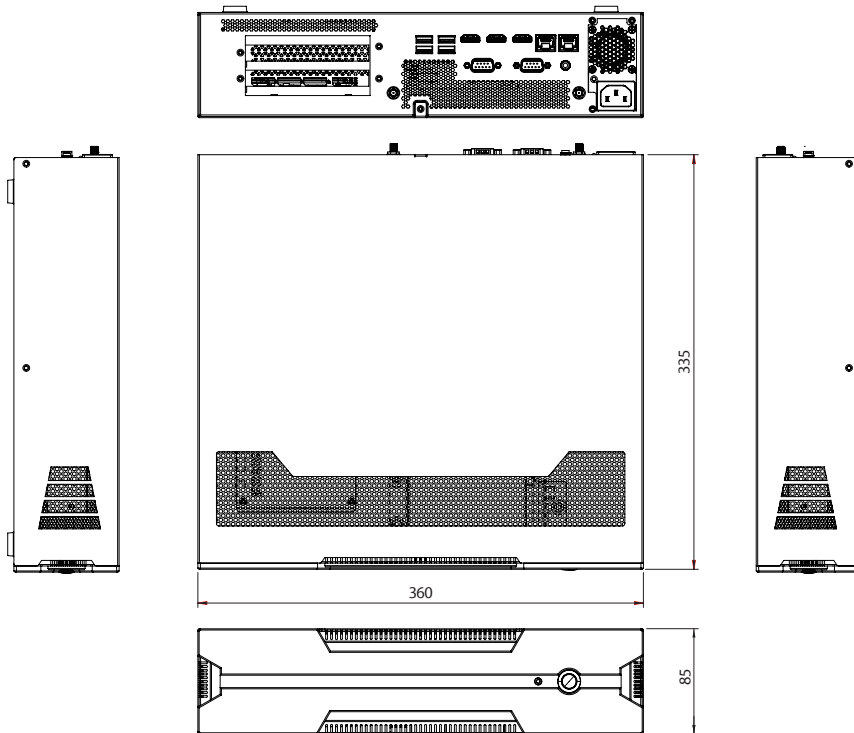

### Internal I/O

- 2 x RS232 COM port box header
- 8 channels GPIO pin header
- 4 x USB 2.0 pin header
- 1 x SATA connector

### I/O Interface

- 1 x Power button with LED
- 1 x HDD LED
- 2 x Antenna hole
- 3 x HDMI 2.0
- 4 x USB 3.0
- 2 x RJ45 with LEDs for gigabit LAN (i219LM/i211AT)
- 1 x COM 1 port RS232/RS422/RS485
- 1 x COM 2 port RS232
- 1 x Audio line out

### Storage

- 1 x SATA 2.5" HDD/SSD
- 1 x M.2 Key M 2280 SSD with SATA/PCIe signal

### Expansion

- PCIe x16 Gen 3 slot (2 slot space available for graphics card)
- 1 x M.2 Key E 2230 supporting Wi-Fi module

### Power Supply

- 1 x 850W power supply
- Input: 100VAC to 240VAC
- Output: +12VDC

### Environment

- Operating temperature: 0°C to 45°C (active cooling design)
- Storage temperature: -20°C to 80°C

- Humidity: 10% to 90% (non-condensing)
- Shock protection: 50G peak acceleration, 11ms according to IEC60068-2-27
- Vibration protection:
  - Random: 2Grms @ 5~500 Hz, IEC60068-2-64 (with SSD)
  - Sinusoidal: 2G @ 5~500 Hz, IEC60068-2-6 (with SSD)

### Certification

- CE (EMC EN55032 + EN55024)
- FCC Class A (EMI part 15B)
- LVD

### Dimensions

- 360mm (W) x 335mm (D) x 85mm (H)

### Operating System Support

- Win10/Linux

## Ordering Information

### Barebone

- **AIEdge-X®300-RTX30 (P/N:10W20X30001X0)**  
Industrial AI computing system at the Edge powered by Intel 8th/9th Gen Intel® Core™ CPU and NVIDIA® graphics card
- **AIBooster®-X8 (P/N: 10E000AIB00X0)**  
Intel® Movidius™ Myriad™ X VPU PCIe deep learning accelerator card