

LEC-3340

IEC 61850-3 Certified 3U Rackmount
Controller System for Power Substation



■ Features

- IEC 61850-3 and IEEE 1613 Certified
- Support Intel® Xeon® E3-1505L V6 or i5-7442EQ CPU (Codename KabyLake-H)
- Support Dual Power Input
- Rich I/O: 4x PCIe slots, 4x GbE RJ45 ports, 5x USB, 2x 2.5" Swappable Drive Bays, support DP and DVI display, 2x Isolated COM ports
- Wide temperature range (-40~70°C)
- Support 2x SO-DIMM DDR4 ECC memory up to 64GB
- Fanless design with corrugated aluminium

■ Preliminary Specifications

Processor System

CPU	Intel® Xeon® E3-1505L V6 or Core i5-7442EQ CPU
Frequency	2.2 GHz or 2.9 GHz
Core Number	Quad core
BIOS	AMI SPI Flash BIOS
Chipset	Intel® CM238

Memory

Technology	DDR4 ECC
Max. Capacity	Up to 64 GB
Socket	2 x 260-pin SODIMM

Graphic

Controller	Intel® Xeon® E3-1505L V6: HD Graphics P530 Intel® Core i5-7442EQ CPU: HD Graphics P630
Display Interface	DP, DVI-D

Ethernet

Controller	Intel® I210IT
Speed	Either 1000 Mbps or 10/100 Mbps
Interface	4 x 1000Base-T GbE RJ45 ports

Storage

SATA	2 x 2.5" Swappable HDD/SSD drive bay support RAID0,1
mSATA	1 x mSATA socket

I/O

Serial Port	2 x DB9 Male (COM1/COM2) on board with isolation supports software selectable RS-232/422/485
Isolation Protection	2KV Digital Isolation
ESD Protection	15KV ESD Protection
USB 3.0	5 x type A, front USB with key lock
Expansion	1 x PCIe x16, 3 x PCIe x4 slots
TPM	TPM 2.0 Onboard

LED

2x Power on for LED (Power1/Power2) in Green
1x Storage access LED for mSATA/HDD1/HDD2 in Green
4x double stack LED for Ethernet active in Yellow; Speed LED 100M in Green; Speed LED 1G: Yellow
2x Double Stack LED for COM1/COM2 TX in Yellow; RX Signal Access in Green
1x Failure LED(User Programmable)in multi-color Red/Green

Watchdog Timer

Watchdog timer 256 level time interval system reset, software programmable

Power

Support Dual Power Module Dual Power Input for 100~240VAC and 16.6~160VDC (SKU A/C)
Dual Power Input for 16.6~160VDC and 16.6~160VDC (SKU B)
Dual Power Input for 100~240VAC/DC (optional PSU kit)

Environment

Operating Temperature	-40 ~ 70°C
Storage Temperature	-40 ~ 85°C
Relative Humidity	5% ~ 95%, non-condensing
Protection Degree	IP20

Mechanical

Dimension (W x H x D)	438 x 131.8 x 300.1 mm
Construction	Aluminum + Steel
Weight	8.5 kg
Mounting	Rackmount


Driver Support

Microsoft Windows	Windows 10 Embedded
Linux	Kernel 4.x, Ubuntu

Certification





EMC	CE, FCC ClassA
Safety	CB,UL
Electrical Substations	IEC 61850-3, IEEE 1613

Product I/O View

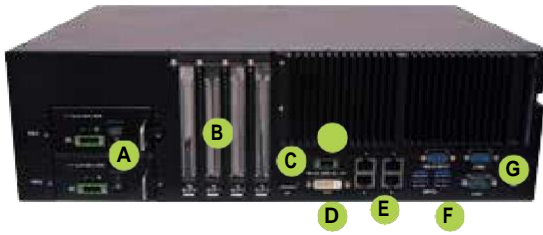

- A** Redundant Power Supply
- B** PCIe x4
- C** DP port
- D** DVI-D
- E** 4x GbE RJ45
- F** USB 3.0 ports
- G** 2x Isolated COM ports
- H** 2x 2.5" Swappable Drive Bays (RAID)
- I** Relay for power failure alarm
- J** Key lock for Front USB

Dimensions (WxHxD): 438 x 131.8 x 300.1 mm

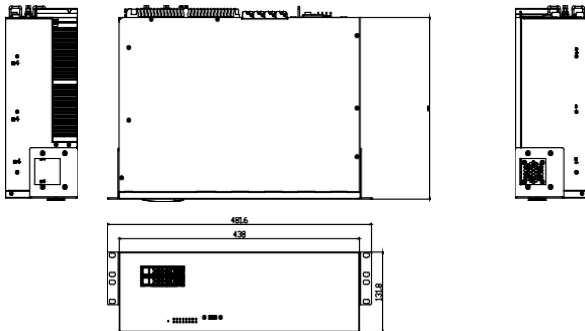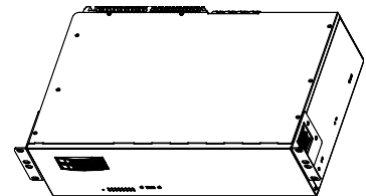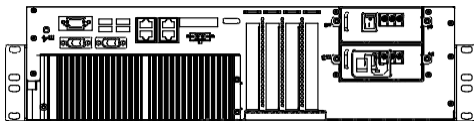

Ordering Information

- LEC-3340A** IEC 61850-3 Compliant Rackmount Controller System for Power Substation Support Intel® Xeon® E3-1505L V6 CPU, Dual PSU AC+DC
- LEC-3340B** IEC 61850-3 Compliant Rackmount Controller System for Power Substation Support Intel® Xeon® E3-1505L V6 CPU, Dual PSU 2xDC
- LEC-3340C** IEC 61850-3 Compliant Rackmount Controller System for Power Substation Support Intel® Core i5-7442EQ CPU, Dual PSU AC+DC
- LEC-3340D** IEC 61850-3 Compliant Rackmount Controller System for Power Substation Support Intel® Xeon® E3-1505L V6 CPU, Dual Power Input for 100~240VAC/VDC (Optional)

V9-2021_4_15

Lanner

© Lanner Electronics Inc. All rights reserved.
 All product specifications are subject to change without notice.
contact@lannerinc.com | www.lannerinc.com