



Main Features

- Built-in Rockchip RK3328 Quad-core ARM® Cortex®-A53 processor up to 1.5GHz
- Built-in u-blox NEO-M8N GPS
- 1 x DB9 for full RS232
- 1 x HDMI, (BOM option VGA + Audio)
- WLAN module option (USB interface)
- 1 x M.2 Key B for WWAN with 1 x internal Micro SIM slot
- SDK for power/reset/WDT/IGN/UVP threshold/GNSS on/off control
- Wide operating temperature -20°C ~ 70°C
- Wide range DC input from 9V ~ 36V
- Certified by CE/FCC/E13

Product Overview

VTC 210 features Quad-core ARM® Cortex®-A53 processor, with powerful graphic and multimedia enhancement. VTC 210 is packed rugged, fanless, and compact enclosure for the vehicles with limited space to locate the computer system. By default, it comes with an advanced GPS receiver supporting GPS/Glonass/QZSS/Galileo/Beidou. VTC 210 features WLAN and WWAN wireless data and voice connectivity with onboard micro SIM slot.

For better protection and control of vehicles, VTC 210 provides SDK control API such as integration modules power/reset on/off, WDT control, ignition delay timer and so on. VTC 210 keeps the flexibility to meet different demands for telematics applications, such as infotainment, fleet management, dispatching system and mobile video surveillance.

Specifications

CPU

- Rockchip RK3328 Quad-core ARM® Cortex®-A53 processor up to 1.5GHz

Memory

- DDR4 2GB onboard (BOM option 4GB)

Storage

- eMMC 16GB onboard
- 1 x Internal microSD slot

Expansion

- 1 x M.2 3042 Key B (USB 2.0, USB 3.0) for WWAN with 1 x internal Micro SIM
- 1 x USB 2.0 wafer for Wi-Fi module

GNSS and Onboard Sensor

- 1 x Default u-blox NEO-M8N GNSS module for GPS/Glonass/QZSS/Galileo/Beidou
- G Sensor and gyroscope

I/O Interface-Front

- 1 x Power button with LED
- 4 x LED for WWAN, WLAN, LAN1, LAN2
- 2 x RJ45 10/100/1000 fast Ethernet with LED
- 1 x USB 2.0 type A

- 1 x Reset button
- 2 x Antenna holes for WLAN
- 1 x Phoenix connector for power (9 ~ 36VDC)/GND/ignition input

I/O Interface-Rear

- 1 x HDMI 2.0a for 4K@60Hz output (BOM option 2nd display, 1 x VGA output + 1 x audio jack output (L/R))
- 3 x Antenna holes for WWAN and GNSS

Power Management

- System power on/off by ignition signal

Operating System

- Linux

Dimensions

- 130mm (W) x 100mm (D) x 31mm (H)


Weight

- 0.5kg

Environment

- Operating temperatures: -20°C to 70°C
- Storage temperatures: -40°C to 85°C
- Relative humidity: 90% (non-condensing)

Dimension Drawing

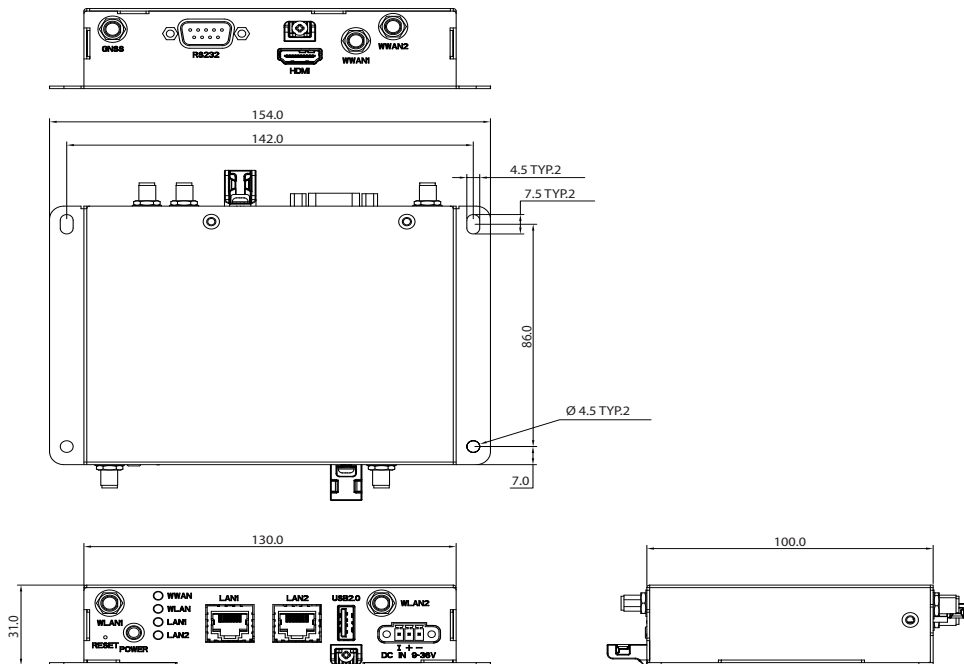

Vibration & Shock

- Vibration
 - Operating: MIL-STD-810H, Method 514.8, Category 4, commoncarrier US highway truck vibration exposure
 - Storage: MIL-STD-810H, Method 514.8, Category 24, minimum integrity test
- Shock
 - Operating: MIL-STD-810H, Method 516.8, Procedure I, functional shock=40g
 - Non-operating: MIL-STD-810H, Method 516.8, Procedure V, crash hazard shock test=75g

Certifications

- CE approval
- FCC Class A
- E13 Mark

Ordering Information

- **VTC 210 (P/N: 10V00021000X0)**
 Quad-core ARM® Cortex®-A53 processor, 2GB DDR4, 16GB eMMC, U-blox GPS module, HDMI output, 2 x LAN, 1 x USB, 1 x RS232, 9 ~ 36VDC input